

EAST COAST FACTORY STYLES & COLORS AVAILABLE:

SELECT STYLE:

☐ SHELLOCK

SELECT DESIRED COLOR:

☐ IVORY

☐ TAN

☐ CAFE

SELECT STYLE:

☐ GRANITELOCK


SELECT DESIRED COLOR:

☐ COOL WHITE


☐ STERLING GRAY

FINISH:


☒ POLISHED

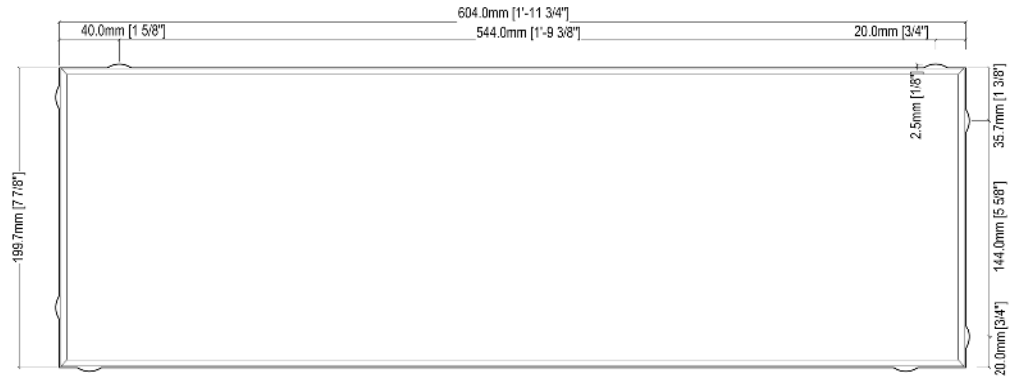

TOP VIEW

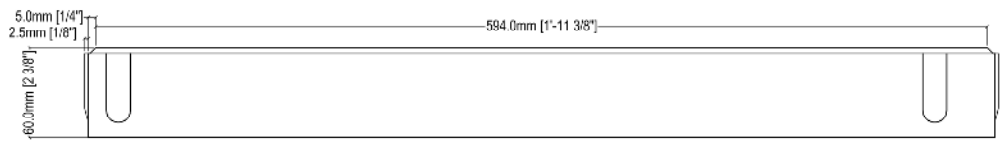

SIDE VIEW

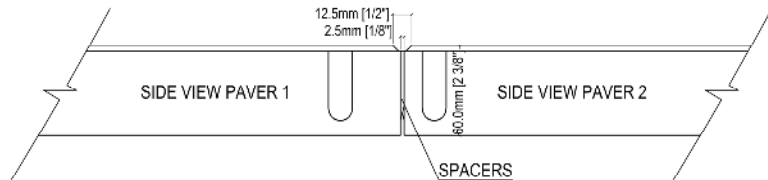

PACKING:

NOMINAL SIZE (in)	SQ.FT.PER PALLET	WEIGHT PER PALLET
8x12x2-3/8" ⁽¹⁾	117	3208

⁽¹⁾ PLANKLOCK® PAVING SLABS CAN BE USED WITH ANY OF OUR 1-5/8" THICK COPING AND SPECIALTY PIECES. TO THE USE 1-5/8" COPING AND SPECIALTY PIECES WITH PLANKLOCK®, THE DECK BASE NEEDS TO BE ADJUSTED TO MATCH THE COPING THICKNESS.

NOTES:

- PAVERS ARE CALIBRATED TO ACHIEVE A UNIFORM THICKNESS OF APPROXIMATELY 2 3/8". DIMENSIONAL TOLERANCE $\pm 1/16"$.
- PAVERS ARE MANUFACTURED IN METRIC SIZES AND ARE ROUNDED TO THE CLOSEST SIZE EQUIVALENT IN ENGLISH UNITS.
- BECAUSE OF COLOR DYE AND NATURAL RAW MATERIALS INCONSISTENCIES, PRODUCTS WILL HAVE COLOR SHADE AND TEXTURE VARIATIONS.
- DUE TO THE PROCESS REQUIRED TO MANUFACTURE, PACKAGE, DELIVER, UNPACK, INSTALL AND COMPACT, SMALL CHIPPING CAN BE EXPECTED.
- IN SHELLOCK® PAVERS, NATURAL SHELLS ARE EMBEDDED AT DIFFERENT DISTANCES FROM THE SURFACE OF THE MATERIAL, AND THEN POLISHED. THEREFORE, A SMALL PERCENTAGE OF THE SHELLS ARE EXPECTED TO COME LOOSE FROM THE SURFACE AND EDGES OF THE TILE. THIS OCCURRENCE WILL DIMINISH OVER A SHORT SPAN OF TIME AND IN NO WAY WILL AFFECT THE STRENGTH OF THE PRODUCT.
- INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH ICPI TECH SPECS 10.
- THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
- ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



PLANKLOCK® PEDESTRIAN PAVERS
SAND-SET INTERLOCKING PAVERS AND PAVING SLABS

REV. DATE:
11/17/2020

artisticpavers.com

MAIN OFFICE- EAST COAST: (305) 653-7283

WEST COAST OFFICE: (520) 426-3479

TECH. SPEC.